

Specifications

Type:	BP-type Li-ion rechargeable battery
Maximum Voltage	DC 16.8V
Nominal Voltage:	DC 14.4V
Nominal Capacity:	9.2Ah 132Wh
Battery Protection Circuit:	Over-discharge, over-charge and over-current
Maximum Discharge Current:	6.0A
Operation Time to shoot without a Light:	Approx 290min
Internal Resistance (maximum):	260mΩ
Power Indicator	5-LED Power Status
DC output:	12V 3.0A
End Voltage:	11V
Operating Temperature:	
Charging:	0°C to 45°C (-10°C to 30°C recommended)
Discharging:	-20°C to 50°C
Storage:	-20°C to 60°C (-0°C to 20°C recommended)
Dimension:	Approx. 85(W)X141.8(D)X66(H)mm
Weight:	Approx. 942g

Storage

- Storage temperature range is -20C 60C. For prolonged battery life, store at 0C 20C is recommended.
- To store the battery for a short period, the battery should be stored in discharged condition.
- To store the battery for a long period, charge the battery for about 20 minutes every five months.
- Before re-use it, it is advisable to recharge the battery fully.

Caution

- Do not puncture or short-circuit the battery.
- Do not burn the battery pack or immerse it in water.
- Always keep the battery in dry place and stay away from humid.
- Do not attempt to break or dismantle the battery pack.



Rechargeable Li-ion Battery Pack for Professional Video Camera

Model: BVM0009

Replace for below models:

IDX E-7S, E-10S, E-50S, E-70S, E-80S
SONY BP-65H, BP-90, BP-GL65, BP-GL95, BP-IL75, BP-L40, BP-L40A,
BP-L60, BP-L60A, BP-L60S, BP-L80S, BP-L90, BP-L90A


User Manual

Thank you for purchasing this rechargeable Li-ion battery pack. We recommend that you read this User Manual with care before using the battery and keep this manual for your future reference.

Features

- High capacity, compact and light-weight.
- Five-step LED indicator for easy checking the battery capacity.
- With LCD operation display to monitor the battery status.

Configuration

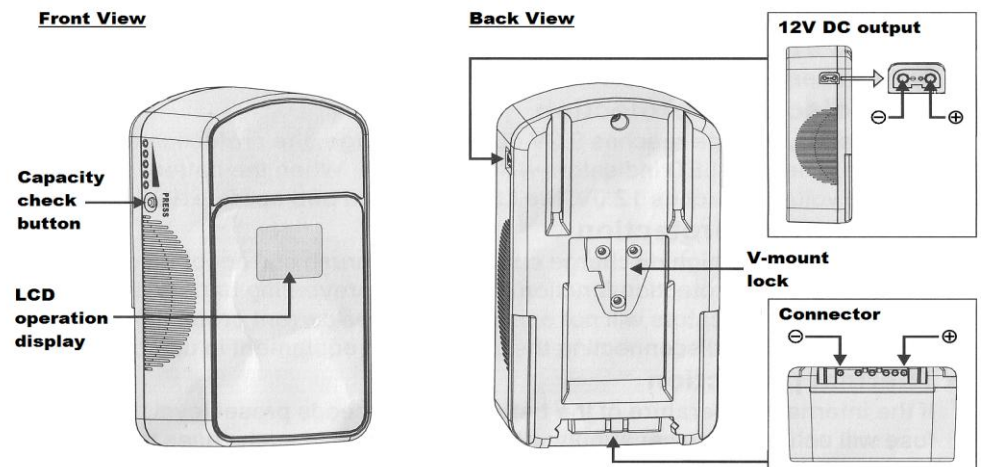

Operating Instruction

Charge

- Charge time may vary depending on different conditions and charger used.
- Operating temperature range of 0°C~45°C. For optimum charging performance 10°C~30°C is recommended
- If the temperature of the battery is below 0°C, the battery will not fully charge even if designated charge time has lapsed. The battery must be charged within the recommended temperature range.

Discharge

- Maximum continuous discharge current is 6.0A
(Note: When using the battery with video or lighting equipment power consumption of the equipment must be 6.0A or below. For the protection of the battery, a load of 6.0A or over may activate the internal protection circuit and terminate the supply of power.)
- The normal operating temperature should be in the range of -20°C~50°C. If the temperature drops below -20°C, discharge may stop.
- The operating voltage range of this battery is 13V~16V. At the end of discharge and when its voltage reached 13V and beyond, the voltage will drop sharply.
(For battery voltage alarm setting, please refer to camera manual)

Battery Protection Circuitry

• Over-charge protection:

If during charge the battery voltage exceeds a preset level, charging is automatically stopped to prevent the battery from being overcharged. The charger will show a charging fault, though the batteries LEDs will continue to show the battery charge capacity. If this happens contact your supplier.

• Over-discharge protection:

If the battery voltage reaches 9.2V during discharge, the protection circuit will operate. Then the LED indicators will not operate. When the battery is recharge and the voltage reaches 12.0V, the LEDs will reset and operate again.

• Over-current protection:

When exposed to a high discharge current, large in-rush current or an external short circuit, the protection function is activated preventing battery discharge. Then the LED indicators will not operate. The over-current protection is automatically reset by disconnecting the battery from equipment in use.

• Thermal protection:


If the internal temperature of the battery pack exceeds preset level, the thermal fuse will activate and power supply will be terminated. In such cases the battery cannot be reset. If this happens contact your supplier.

Battery Capacity Status LED Indication


LED indicators	Battery Capacity
● ● ● ● ○	Below 20%
● ● ● ○ ○	Below 40%
● ● ○ ○ ○	Below 60%
● ○ ○ ○ ○	Below 80%
○ ○ ○ ○ ○	100% charged

● OFF ○ ON


Instruction for LCD operation display

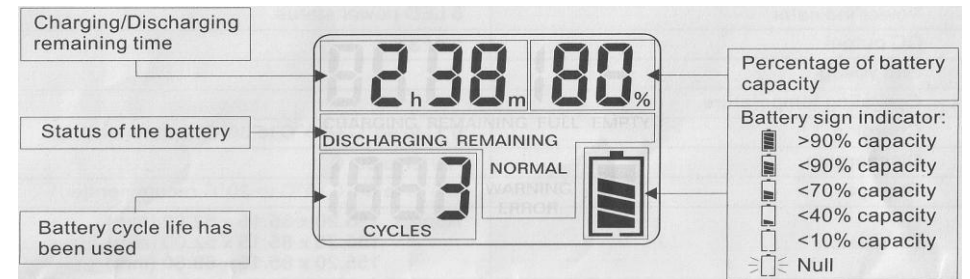

Charge the battery

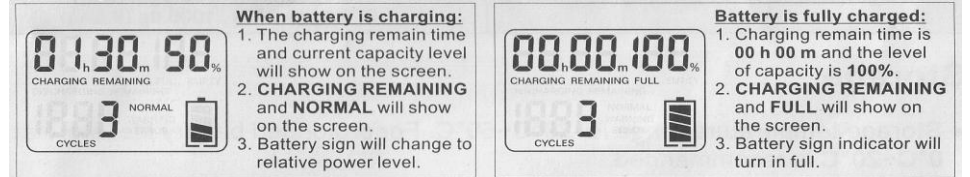

Discharge the battery

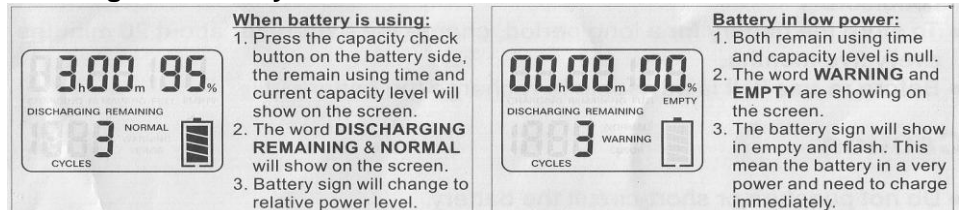

Error message

